




AHC

Female Threaded Elbow

Female Threaded Elbow are used to assemble on 90° two pipes or components with male threaded.

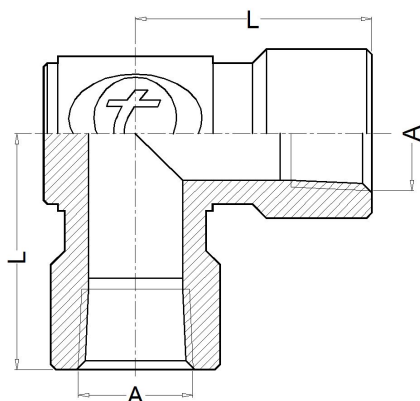

Features

- Wide range of sizes and connections.
- Suitable for pipes of different materials.
- Anti-leakage guarantee.
- Threaded NPT ends according to ANSI B1.20.1.
- Threaded BSP ends according to DIN ISO 228-1.
- Max. working pressure according to ASME B31.1.

Technical data

A	Code NPT	Code BSP	L (mm)	Max. Pres. (bar)
1/8"	91200	91250	26.5	427
1/4"	91201	91251	30	496
3/8"	91202	91252	36	385

A	Code NPT	Code BSP	L (mm)	Max. Pres. (bar)
1/2"	91203	91253	40	385
3/4"	91204	91254	48	351
1"	91205	91255	48	440

Materials

Among the wide range of alloys existing, TECVAL has selected those considered by our customers as most suitable, which we stock to ensure a quick and effective supply: AISI-316L (1.4404) **A4**, AISI-316Ti (1.4571) **A6**, AISI-904L (1.4539) **A9**, Duplex (1.4462) **AD**, SuperDuplex (1.4410 / 1.4501) **AS**, 254-SMO (1.4547) **AV**, Alloy 400 (2.4360) **MO**, Alloy 625 (2.4856) **IN**, Alloy 825 (2.4858) **CO**, Titanium Gr.2 (3.7034) **TI**, Hastelloy C-276 (2.4819) **HA**. Whether you do not find the required alloy or need further information about our special alloys valves and fittings, please address your inquiry to our Technical Department.

Ordering information

The fittings references are formed in two parts:

Fitting Code Look for it in the technical data.

Material Code Look for it in the materials list.

Example: Female Elbow AHC 1/4"NPT AISI-316L will be: **91201 A4**.

The reference required to place the order is **91201A4**.

Packaging

All TECVAL fittings are supplied packed in individual polyethylene airtight bags. Everything is 100% recyclable.



TECVAL S.L.
C/Berlin, 1 Nave 4
Pol.Can Torrella
08233-VACARISSES
Barcelona - SPAIN
Tel: +34 938 280 055
tecval@tecval.es