




CAP

Compressing Tube Cap

The CAP two-ferrule compressing fittings are used to block the tube. The resulting union is completely hermetic, both for high pressure and high temperatures.

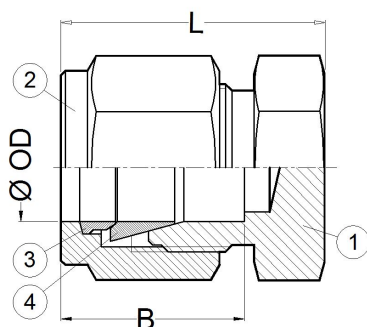

Features

- Easy and fast mounting.
- Resistant to vibration.
- Hard fastening and union without twisting.
- Anti-leakage guarantee.
- Metric tube from 6mm to 12mm.
- Fractional tube from 1/4" to 3/4".

Technical data

Ø OD	Code	L (mm)	B (mm)
6	86003	23	16
1/4"	86004	23	16
8	86006	24	17
3/8"	86007	27	17

Ø OD	Code	L (mm)	B (mm)
10	86008	27	17
12	86009	29	23
1/2"	86010	29	23
3/4"	86014	31	24

Materials

SuperDuplex (1.4410 / 1.4501) **A5**

AISI-904L (1.4539) **A9**

Assembly parts: ①Body, ②Nut, ③Back ferrule, ④Front ferrule.

Ordering information

The fittings references are formed in two parts:

Fitting Code Look for it in the technical data.

Material Code Look for it in the materials list.

Example: Compressing Tube CAP of 12mm.OD AISI-316L will be:

86009 A4. The reference required to place the order is **86009A4**.

Packaging

All TECVAL fittings are supplied packed in individual polyethylene airtight bags. Everything is 100% recyclable.



TECVAL S.L.
C/Berlin, 1 Nave 4
Pol.Can Torrella
08233-VACARISSES
Barcelona - SPAIN
Tel: +34 938 280 055
tecval@tecval.es